



A
 CONCRETE ENTRANCE
 SCALE: 1"=2'

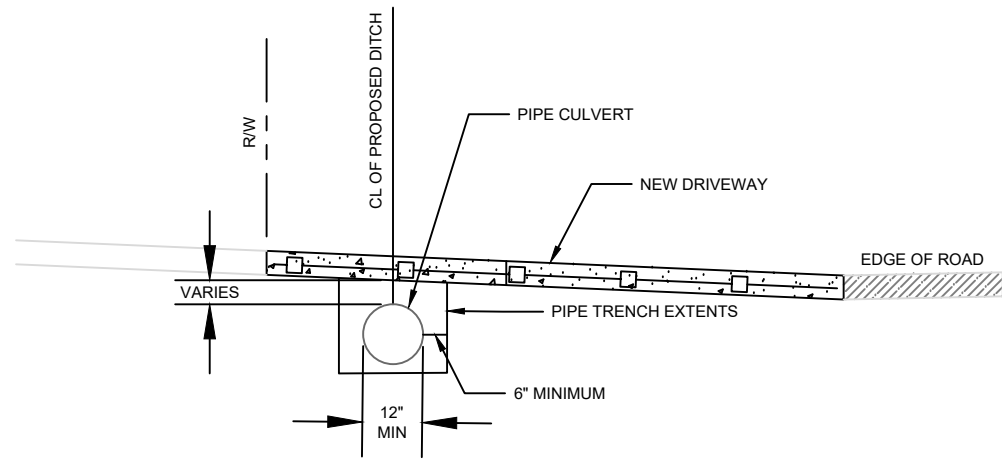

1
 TYPICAL DITCH SECTION
 SCALE: 1"=2'

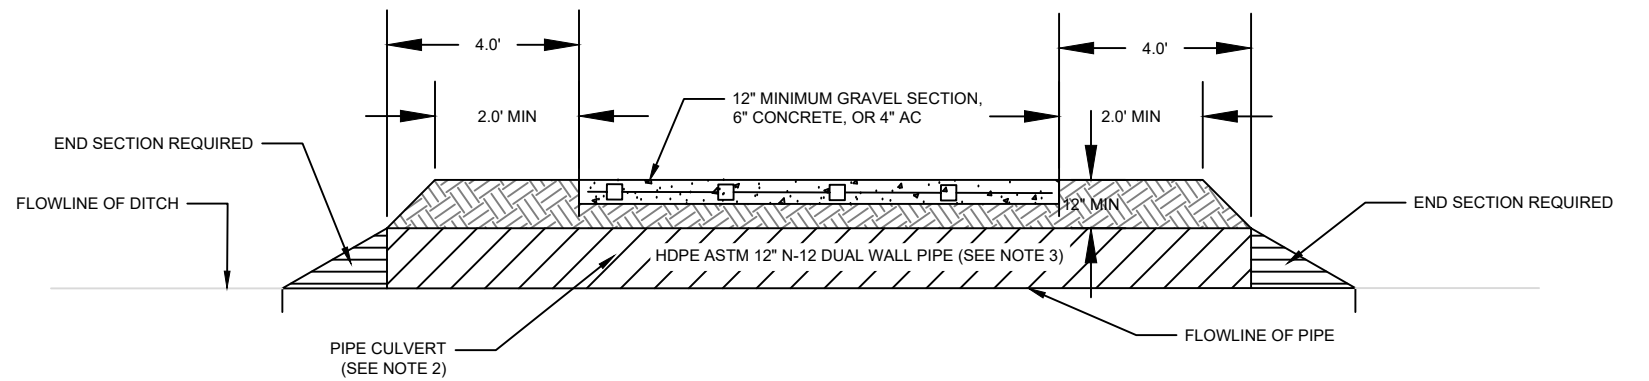

2
 SECTION THROUGH DRIVEWAY CULVERT
 SCALE: 1"=2'

NOTES:

1. BACKFILL AROUND PIPE MUST BE COMPACTED TO A SPECIFIED AASHTO T-99 DENSITY OF 90%.
2. THE PIPE CULVERT WILL BE 12" MINIMUM OR EQUAL TO THE SIZE OF THE NEXT UPSTREAM PIPE, WHICHEVER IS GREATER.
3. IF MINIMUM COVER (12") CANNOT BE MET, 6" CONCRETE OR 4" AC WILL BE REQUIRED.
4. ALL DRIVEWAY CULVERTS ARE CONSIDERED PRIVATE AND PROPERTY OWNER SHALL BE RESPONSIBLE FOR ALL MAINTENANCE AND INSTALLATION COSTS.



NOTES:

1. THIS DETAIL HAS BEEN MODIFIED BY THE CITY OF WINSTON. ALL MATERIAL AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE CURRENT OREGON STANDARD SPECIFICATIONS.

WINSTON STANDARD DRAWING

**DRIVEWAY CULVERT
 STANDARD DETAIL**